

FIG. 1

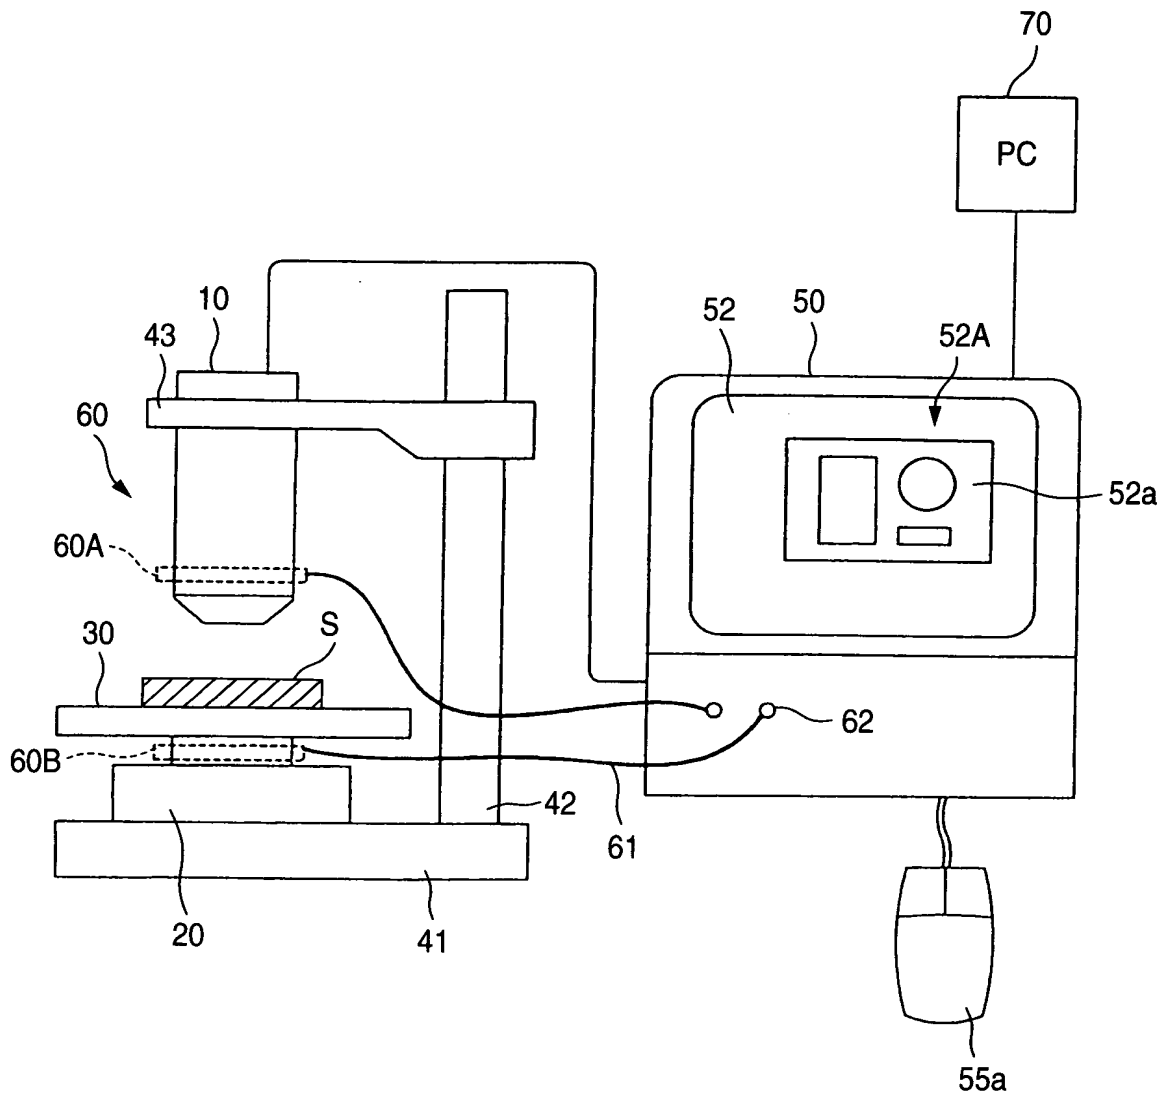


FIG. 2

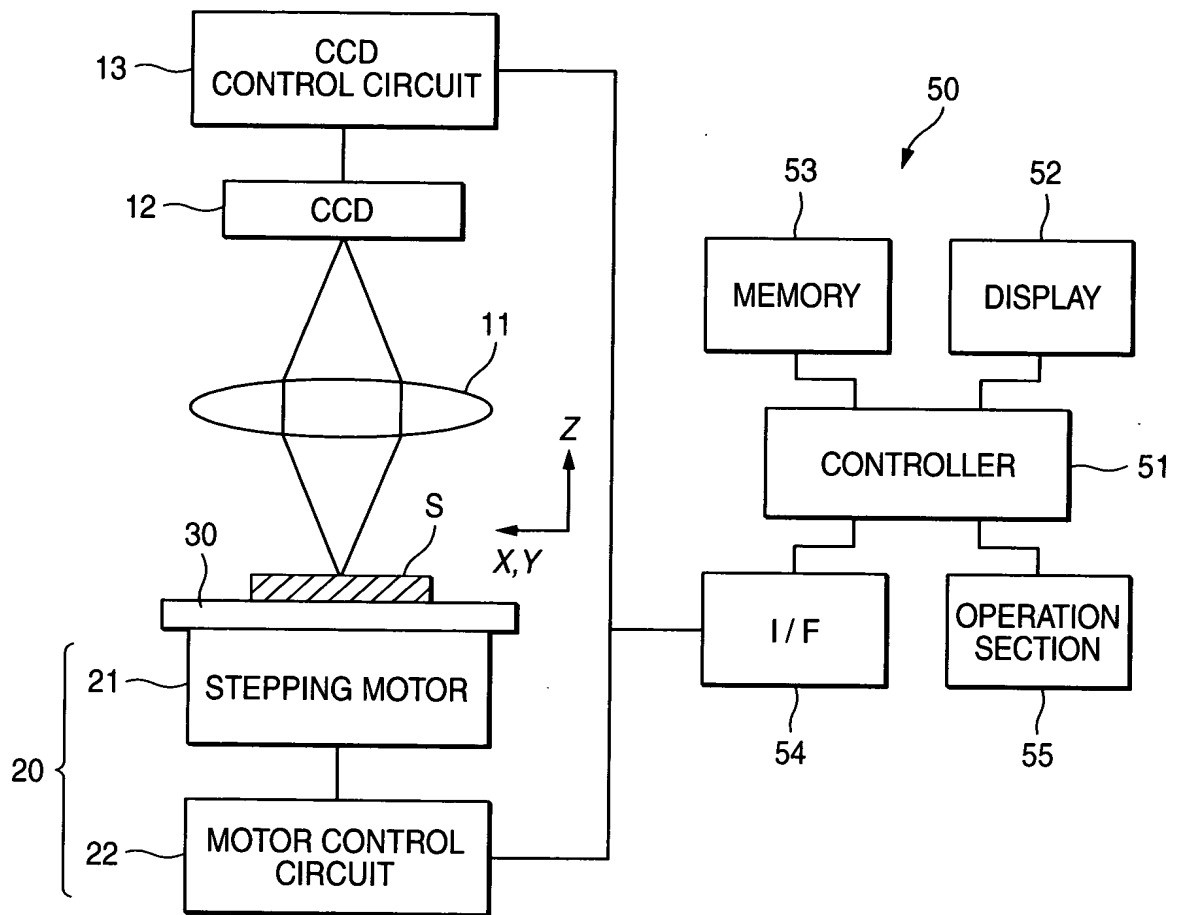


FIG. 3A

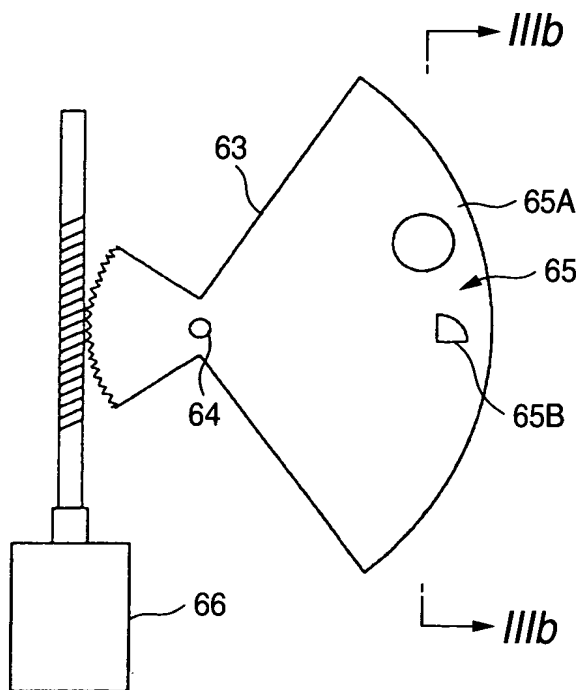


FIG. 3B

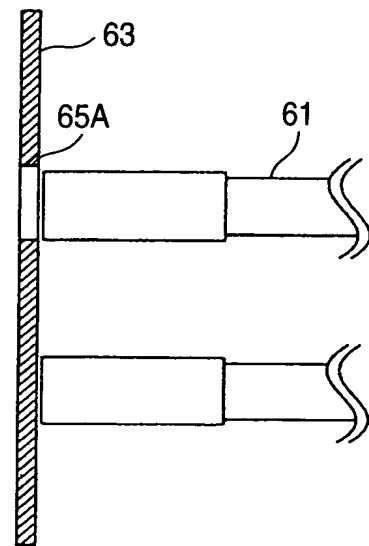


FIG. 4A

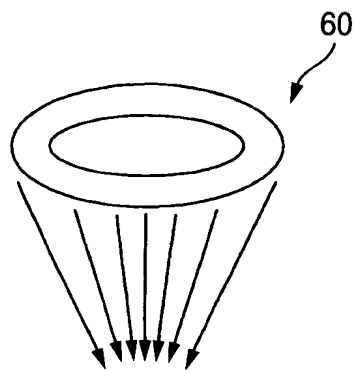


FIG. 4B

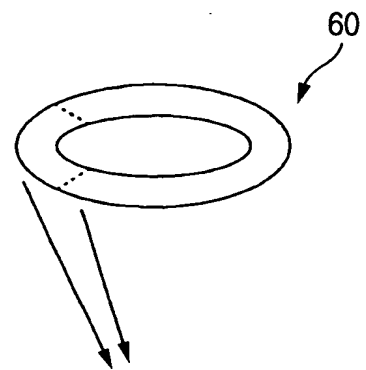


FIG. 4C

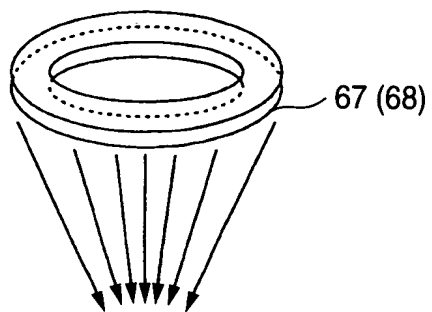


FIG. 4D

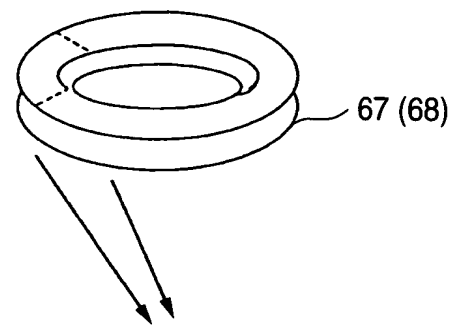


FIG. 5

52

SELECTION OF ILLUMINATION CONDITIONS

<input checked="" type="radio"/> INCIDENT-LIGHT ILLUMINATION	<input type="radio"/> TRANSMITTING ILLUMINATION
<input checked="" type="radio"/> PERIPHERAL ILLUMINATION	<input type="radio"/> SIDE ILLUMINATION
<input type="radio"/> NO FILTER	<input checked="" type="radio"/> DIFFUSER
	<input type="radio"/> POLARIZER

FIG. 6

52

SELECTION OF ILLUMINATION CONDITIONS

☒ INCIDENT-LIGHT ILLUMINATION ☐ TRANSMITTING ILLUMINATION

☒ PERIPHERAL ILLUMINATION ☐ SIDE ILLUMINATION

☐ NO FILTER ☒ DIFFUSER ☐ POLARIZER

LIGHT QUANTITY OF LAMP

A horizontal slider bar with five vertical tick marks. A small rectangular slider knob is positioned at the third tick mark from the left.

FIG. 7

52

SELECTION OF ILLUMINATION CONDITIONS

☒ INCIDENT-LIGHT ILLUMINATION ☐ TRANSMITTING ILLUMINATION

☒ PERIPHERAL ILLUMINATION ☐ SIDE ILLUMINATION

☐ NO FILTER ☒ DIFFUSER ☐ POLARIZER

LIGHT QUANTITY OF LAMP

CAMERA GAIN

☒ AUTO ☐ MANUAL

FIG. 8

52

SELECTION OF ILLUMINATION CONDITIONS

☒ INCIDENT-LIGHT ILLUMINATION ☐ TRANSMITTING ILLUMINATION

☒ PERIPHERAL ILLUMINATION ☐ SIDE ILLUMINATION

☐ NO FILTER ☒ DIFFUSER ☐ POLARIZER

LIGHT QUANTITY OF LAMP

—————|—————|—————|—————|—————|

CAMERA GAIN

☒ AUTO ☐ MANUAL

FILTER OPERATION

☒ ON ☐ OFF

FIG. 9

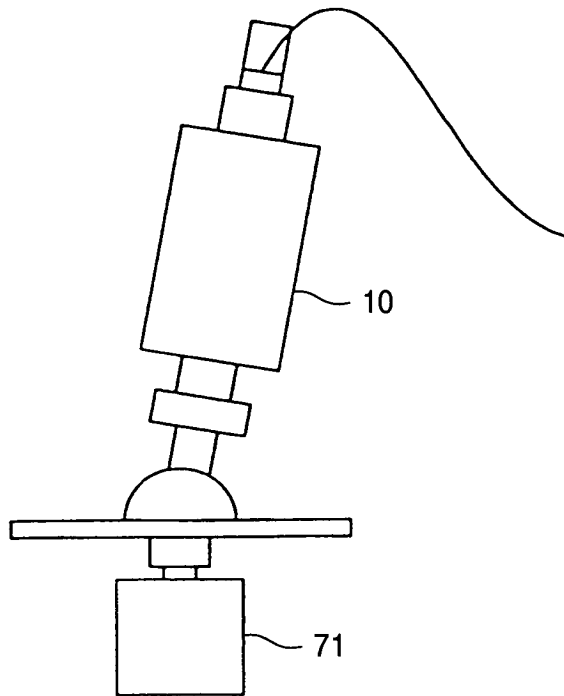


FIG. 10A

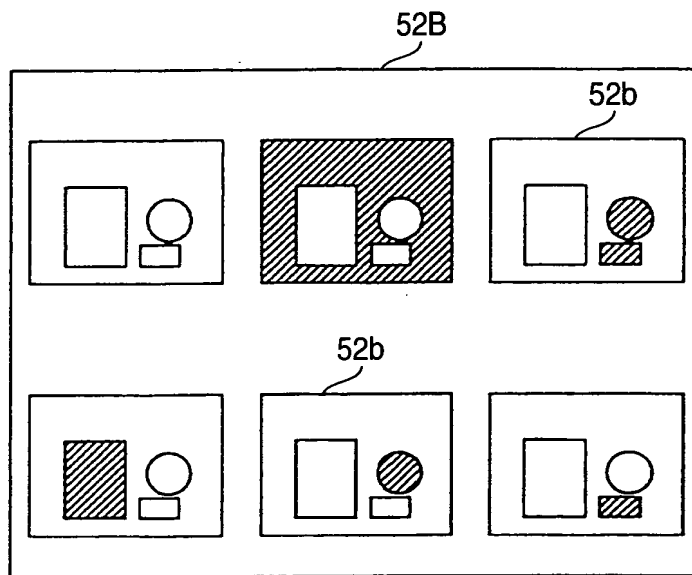


FIG. 10B

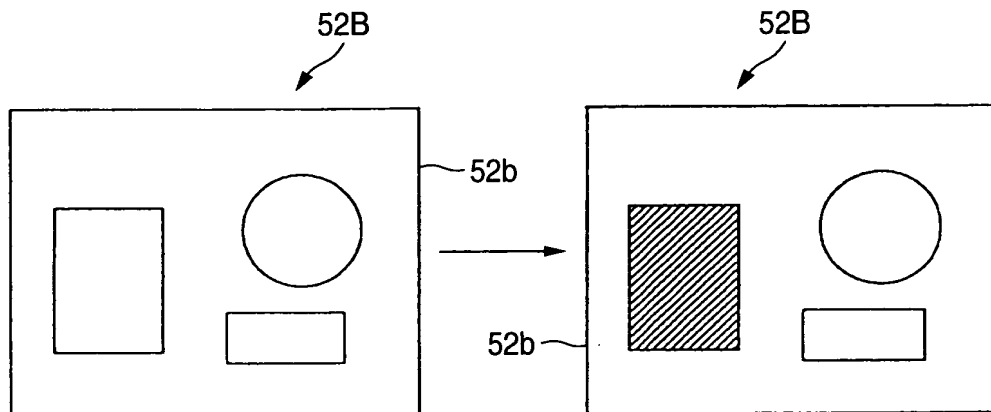


FIG. 11